IsoFlex Technologies Pty Ltd.
Unit 5, 7 Waterway Drive, Gold Coast Marine Precinct, Coomera, Queensland, Australia. 4209
Ph: 1300 366 393 Ph: 07 555 60 924 F: 07 555 60 984 Int prefix: 617
Email: info@isoflex.com.au
Home Page: www.isoflex.com.au

IsoFlex Mount Data Sheet

Loading:

1. Axial - Vertical Down (A-direction)

Mount Model: M50-16B

'M50' = model number
'16' = thread size
'B' = bolt type

Resilient Element Colour	Shore Durometer Hardness A-scale SDH-A
Yellow	50
Red	60
Black	70

Base: Black - 75 SDH-D

All metal components silver zinc plated

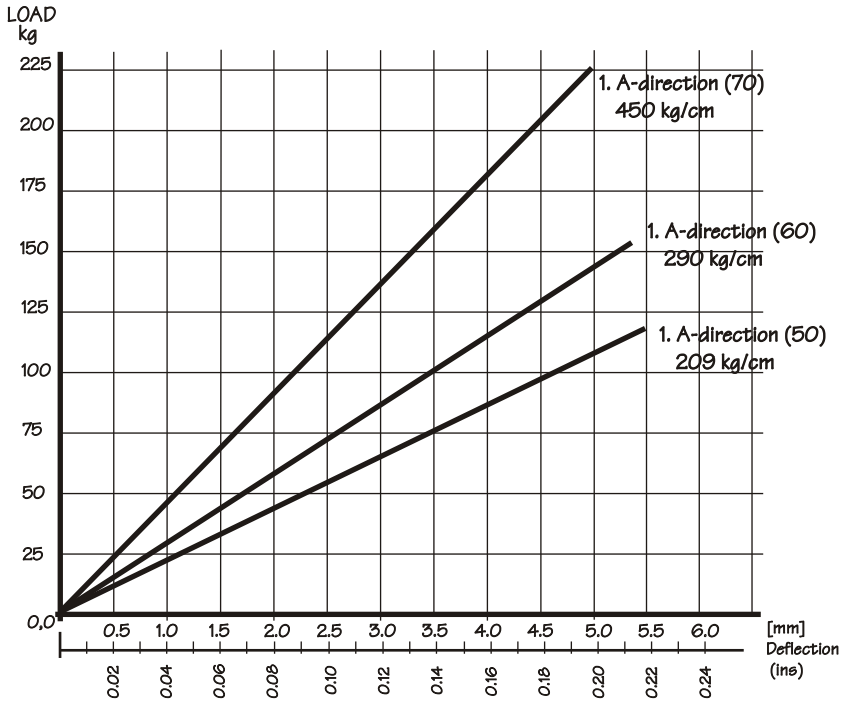

Graph:
1. Static Axial Vertical Load[kg] (A-direction) versus Deflection[mm] (ins)

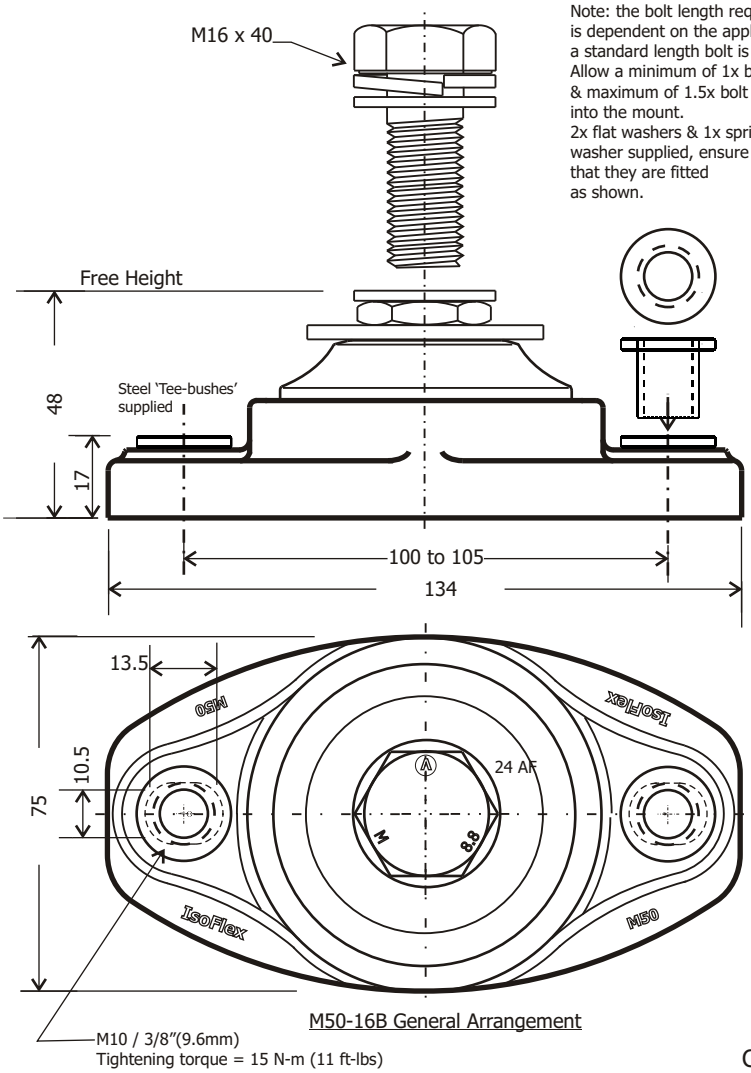

Note: the bolt length required is dependent on the application, a standard length bolt is supplied. Allow a minimum of 1x bolt dia & maximum of 1.5x bolt dia into the mount.
2x flat washers & 1x spring washer supplied, ensure that they are fitted as shown.

M50-16B General Arrangement

Model Number: M50-12B(60) shown

Dimensions in millimetres (mm.) - unless stated otherwise

Drawing number: DSA-M50-16B
Drawn: PB Date:13-10-06

Copyright © 2006 **IsoFlex Technologies Pty Ltd.**
Specifications are subject to change without notice.